

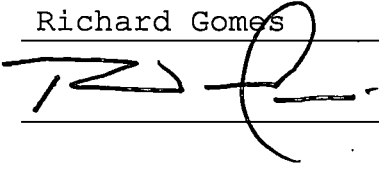
SIGNATURE PAGE

To the Board of County Commissioners of the County of Monmouth:

**THE UNDERSIGNED HEREBY DECLARES THAT
I (WE) HAVE CAREFULLY EXAMINED THE SPECIFICATIONS.
I (WE) HEREBY CERTIFY PRICES QUOTED ARE IN ACCORDANCE
WITH YOUR REQUIREMENTS.**

Company Name: Underground Utilities Corp.
(PRINT)

Preparer's Name: Richard Gomes
(PRINT)

Signature:  10/26/2022
(DATE)

Address: 711 Commerce Road, Linden, New Jersey 07036

Telephone No.: 908-862-8936

Fax No.: 908-862-8690

E-Mail Address: rgomes@undergroundutilitiescorp.com

Contact Person: Richard Gomes

FEIN: _____
(Federal Employee ID)

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

**REPLACEMENT OF BRIDGE R-5
ON COUNTY ROUTE 39 (FLORENCE
AVENUE) OVER CHINGARORA CREEK
IN THE BOROUGH OF UNION BEACH,
MONMOUTH COUNTY, NEW JERSEY**

F-53-2022

ITEM No.	EST. QTY.	UNIT	DESCRIPTION	UNIT PRICE	AMOUNT
1	1	LS	Progress Schedule	\$15,000	\$15,000
2	4	UNIT	Progress Schedule Update	\$1,500	\$6,000
3	1	LS	Mobilization	\$315,000	\$315,000
4	1	DOLLAR	Construction Layout	\$30,000	\$30,000
5	880	LF	Silt Fence	\$4.00	\$3,520
6	7	UNIT	Haybale	\$15.00	\$105
7	7	UNIT	Inlet Filter, Type 2, 2' x 4'	\$200.00	\$1,400
8	8	UNIT	Breakaway barricade	\$1.00	\$8.00
9	50	UNIT	Drum	\$1.00	\$50.00
10	50	UNIT	Traffic Cone	\$1.00	\$50.00
11	849	SF	Construction Sign	\$40.00	\$33,960
12	400	LF	Construction Barrier Curb	\$40.00	\$16,000
13	4	UNIT	Flashing Arrow Board	\$2,000	\$8,000
14	4	UNIT	Portable Variable Message Sign	\$5,000	\$20,000
15	4	UNIT	Traffic Control Truck with Mounted Crash Cushion	\$5,000	\$20,000
16	1000	LF	Temporary Traffic Stripes, 4"	\$.72	\$720
17	100	SF	Temporary Traffic Markings	\$3.30	\$330
18	24	SF	Monmouth County Project Sign, 6' x 4'	\$100	\$2,400
19	1	ALL	Uniformed Police Officers Allowance	\$25,000.00	\$25,000.00
20	1	DOLLAR	Fuel price adjustment	\$15,000.00	\$15,000.00
21	1	DOLLAR	Asphalt price adjustment	\$15,000.00	\$15,000.00
22	1	LS	Vibration Monitoring	\$55,000	\$55,000
23	1	LS	Clearing Site	\$25,000	\$25,000
24	1	LS	Clearing Site, Bridge	\$40,000	\$40,000
25	1	LS	Temporary Shielding	\$5,000	\$5,000
26	20	CY	Excavation, test pits	\$300.00	\$6,000
27	2178	CY	Excavation, Unclassified	\$60.00	\$130,680
28	2178	CY	Excavation, regulated material	\$20.00	\$43,560
29	3676	TON	Disposal of regulated material	\$35.00	\$128,660
30	380	CY	I-9 Soil Aggregate	\$60.00	\$22,800
31	120	CY	I-11 Soil aggregate	\$60.00	\$7,200
32	2200	CY	I-14 Soil aggregate	\$60.00	\$132,000
33	350	SY	Geotextile, roadway stabilization	\$5.00	\$1,750
34	2850	SY	Dense graded aggregate base course, 6" thick	\$11.00	\$31,350
35	3400	LF	Polymerized Joint Adhesive	\$1.65	\$5,610

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

**REPLACEMENT OF BRIDGE R-5
ON COUNTY ROUTE 39 (FLORENCE
AVENUE) OVER CHINGARORA CREEK
IN THE BOROUGH OF UNION BEACH,
MONMOUTH COUNTY, NEW JERSEY**

F-53-2022

ITEM No.	EST. QTY.	UNIT	DESCRIPTION	UNIT PRICE	AMOUNT
36	415	TON	Hot Mix Asphalt 9.5M64 surface course	\$ 150	\$ 62,250
37	1005	TON	Hot Mix Asphalt 19M64 base course	\$ 121	\$ 121,605
38	1	LS	Temporary Cofferdam	\$ 300,000	\$ 300,000
39	1	LS	Permanent Cofferdam	\$ 250,000	\$ 250,000
40	1	LS	Furnishing Equipment for Driving Piles	\$ 150,000	\$ 150,000
41	240	LF	Test Pile, Furnished	\$ 100	\$ 24,000
42	240	LF	Test Pile, Driven	\$ 40	\$ 9,600
43	4	UNIT	Dynamic Pile Load Test	\$ 7,000	\$ 28,000
44	3400	LF	Cast-In-Place Concrete Pile, Furnished, 12.75" Diameter	\$ 100	\$ 340,000
45	3400	LF	Cast-In-Place Concrete Pile, Driven, 12.75" Diameter	\$ 40	\$ 136,000
46	72	UNIT	Pile Shoe	\$ 1,000	\$ 72,000
47	28400	LB	Reinforcement Steel, Galvanized	\$ 3.00	\$ 85,200
48	111	CY	Concrete Footing	\$ 600	\$ 66,600
49	37	CY	Concrete Wing Wall	\$ 1,100	\$ 40,700
50	34	LF	Concrete Pylon, HPC	\$ 600	\$ 20,400
51	45	LF	Precast Concrete Culvert (30'-0" Wide X 7'-10 7/8" High)	\$ 11,567	\$ 520,515
52	1	UNIT	Bridge Identification Plaque	\$ 4,000	\$ 4,000
53	32	CY	Concrete Bridge Deck, HPC	\$ 1,300	\$ 41,600
54	10	CY	Concrete Bridge Sidewalk, HPC	\$ 1,300	\$ 13,000
55	82	LF	Steel 4-Bar Bridge Railing, Powder Coated Black	\$ 450	\$ 36,900
56	60	LF	15" reinforced concrete pipe, class V	\$ 175	\$ 10,500
57	113	LF	18" reinforced concrete pipe, class V	\$ 175	\$ 19,775
58	270	LF	24" reinforced concrete pipe, class V	\$ 200	\$ 54,000
59	128	LF	8" Perforated High Density Polyethylene Pipe	\$ 50	\$ 6,400
60	1	UNIT	24" x 38" reinforced concrete end section	\$ 7,500	\$ 7,500
61	9	LF	24" x 38" reinforced concrete elliptical pipe, class HE-IV	\$ 400	\$ 3,600
62	4	CY	Concrete headwall with apron	\$ 2,000	\$ 8,000
63	2	UNIT	Inlet, Type B, 6" Head	\$ 5,000	\$ 10,000
64	5	UNIT	Inlet, Type B, 8" Head	\$ 5,000	\$ 25,000
65	148	SY	Riprap stone slope protection, 14" thick (D50=7")	\$ 200	\$ 29,600

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

**REPLACEMENT OF BRIDGE R-5
ON COUNTY ROUTE 39 (FLORENCE
AVENUE) OVER CHINGARORA CREEK
IN THE BOROUGH OF UNION BEACH,
MONMOUTH COUNTY, NEW JERSEY**

F-53-2022

ITEM No.	EST. QTY.	UNIT	DESCRIPTION	UNIT PRICE	AMOUNT
66	56	SY	Riprap stone slope protection, 36" thick (D50=7")	\$ 200	\$ 11,200
67	37	SY	Riprap stone channel protection, 14" thick (D50=7")	\$ 200	\$ 7,400
68	5	SY	Riprap stone channel protection, 36" thick (D50=7")	\$ 200	\$ 1,000
69	605	LF	Temporary Chain-Link Fence, 8' High	\$ 10	\$ 6,050
70	901	SY	Concrete sidewalk, 4" thick	\$ 125	\$ 112,625
71	55	SY	Hot Mix Asphalt driveway, 6" thick, commercial	\$ 65	\$ 3,575
72	42	SY	Concrete driveway, reinforced, 10" thick	\$ 125	\$ 5,250
73	4	SY	Detectable warning surface	\$ 300	\$ 1,200
74	1616	LF	6" x 8" x 20" concrete vertical curb	\$ 30	\$ 48,480
75	135	SY	Non-vegetative surface, hot mix asphalt	\$ 72	\$ 9,720
76	87.5	LF	Beam guide rail, powder coated black	\$ 65	\$ 5,687
77	4	UNIT	Tangent guide rail terminal, powder coated black	\$ 5,300	\$ 21,200
78	4	UNIT	Approach guide rail transition TL-2, powder coated black	\$ 3,800	\$ 15,200
79	1548	LF	Traffic markings lines, 4" wide	\$ 1.29	\$ 1,996.92
80	133	LF	Traffic markings lines, 24" wide	\$ 7.70	\$ 1,024.10
81	75	SF	Regulatory and warning sign	\$ 44	\$ 3,300
82	3	UNIT	Reset water valve box	\$ 200	\$ 600
83	4	UNIT	Reconstruct manhole, sanitary sewer, using new casting	\$ 1,500	\$ 6,000
84	1254	LF	Video Inspection of 54" Dia. Gravity Sewer	\$ 50	\$ 62,700
85	145	SY	Topsoiling, 5" thick	\$ 20	\$ 2,900
86	20	CY	Borrow topsoil	\$ 30	\$ 600
87	75	SY	Fertilizing and seeding, type W	\$ 1.00	\$ 75
88	70	SY	Fertilizing and seeding, type A-3	\$ 1.00	\$ 70
89	198	SY	Topsoil stabilization, type 1 mat	\$ 2.00	\$ 396
90	70	SY	Straw Mulching	\$ 2.00	\$ 140

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

REPLACEMENT OF BRIDGE R-5
ON COUNTY ROUTE 39 (FLORENCE
AVENUE) OVER CHINGARORA CREEK
IN THE BOROUGH UNION BEACH,
MONMOUTH COUNTY, NEW JERSEY


F-53-2022

TOTAL LUMP SUM BID ALL ITEMS \$ 3,987,287.52
(Numeric)

Three million Nine Hundred Eighty Seven Thousand Two Hundred Eighty Seven Dollar
(Written) and Fifty Two Cents.

CONTRACTOR: Underground Utilities Corp.

BY: Richard Gomes
(Printed)


(Signature)

TITLE: President

DATE: 10/26/2022